



Ultra-Low-Power CO₂ Sensor with Power Cycling, UART and I²C Interface

Zero power consumption when not taking measurements

The CozIR[®]-Blink is an ultra-low-power NDIR CO₂ sensor using state-of-the-art solid-state LED optical technology. The low-power LEDs are manufactured in-house, giving GSS complete control of the CO₂ sensor signal chain.

About CozIR[®]- Blink

The CozIR[®]-Blink uniquely allows users to reduce the power consumption of CO₂ measurements to unprecedented levels. The CO₂ sensor can be power-cycled, allowing the user to wake-up the unit from a dormant state, take a reading, and then power it down completely again, reducing power consumption to zero.

The power cycling function is particularly valuable in battery-powered or wirelessly connected interface applications where power is at a premium.

The CozIR[®]-Blink also features a built-in auto-calibration function that maintains CO₂ measurement accuracy over the lifetime of the product.

Features

- Ultra-low-power CO₂ sensor
- 30ppm (typ.) measurement accuracy
- Solid state LED optical technology
- UART or IC control and data interface
- Power cycling compatible
- Built-in auto-calibration
- California Building Standards Code, Title 24 compliant

Applications

- Indoor Air Quality (IAQ)
- IoT and Smart Technology wireless connectivity
- Air Quality and HVAC Systems
- Building Management Systems (BMS)
- Demand-Controlled Ventilation (DCV) systems

CO₂ Sensor Specifications

Measurement Ranges	0-2000ppm, 0-5000ppm, 0- 10000ppm (0-1%)
Accuracy (typ.)	±(30ppm +3% of reading)
Time to 1st Reading	<3.5 seconds
Response Time	<30 Seconds (Diffusion limited)
Sample Method	Solid-state LED NDIR Diffusion

Electrical and Mechanical Specifications

Measurement Output	UART or I ² C
Supply Voltage	3.25V - 5.5V
Power Consumption (typ.)	<500µW @ 3.3V
Dimensions and Weight	31mm x 19.5mm x 8.7mm, 2.5g

Rev.I_062020_CozIR-Blink_engl • Subject to change



CozIR[®] Series

Further models from our series



CozIR[®]-A
with optional temperature and humidity sensing.



CozIR[®]-LP
Ultra-Low-Power CO₂ sensor



CozIR[®]-LP 2
Ultra-Low-Power CO₂ sensor with I²C Interface



HTK Hamburg GmbH

Oehleckerring 32
22419 Hamburg

Phone: +49 (0)40 - 600 38 38 - 0
Fax: +49 (0)40 - 600 38 38 - 99
info@htk-hamburg.com

Gas Sensing Solutions Ltd.
60-62 Grayhill Road
Westfield North Courtyard
Cumbernauld,
United Kingdom, G68 9HQ

© Copyright 2019 - All contents of this document, in particular Texts, photographs and graphics are protected by copyright. All rights, including reproduction, publication, processing and translation are reserved, HTK Hamburg GmbH. Please contact HTK Hamburg GmbH if you would like to use the contents of this document.

Rev.I_062020_CozIR-Blink_engl • Subject to change

Operating Conditions


Operating Conditions - Temperature	0°C to 50°C
Operating Conditions - Humidity	0-95% RH, non-condensing
Storage Conditions - Temperature	-40°C to +70°C
Pressure Dependence	500mbar - 1500mbar
Sensor Lifetime	>15 years
Environmental Compliance	RoHS and REACH

Ordering Information

COZIR-BLINK-X

X	Measurement Range
2000	2000ppm
5000	5000ppm
1	10,000ppm (1%)

Dimension Drawing - CozIR[®] - Blink

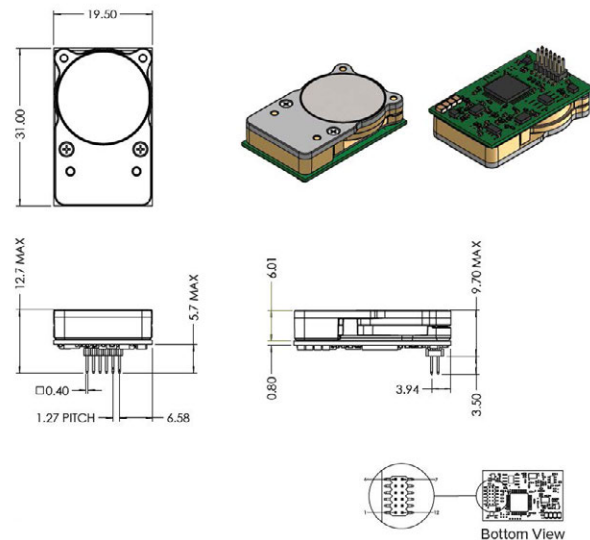

Pin-Out Description - CozIR[®] Blink

Pin	Name	Type	Description
1	GND	Supply	Sensor ground
2	VDD	Supply	Sensor supply voltage
3	Rx_In	Digital Input	UART Receive Input
4	Tx_Out	Digital Output	UART Transmit Output
5	NC	Unused	Do not connect
6	READY	Digital Output	Data ready pin. Pulsed high when data ready
7	NC	Unused	Do not connect
8	NC	Unused	Do not connect
9	NC	Unused	Do not connect
10	I ² C_ENABLE	Digital Input	Set low for I ² C interface mode. Leave floating to select UART interface mode. Pin status detected at power on.
11	I ² C_SCL	Digital Input	I ² C serial clock input. Open drain, external 4.7kΩ resistor pulled high to VDD required
12	I ² C_SDA	Digital Input/Output	I ² C serial data input/output. Open drain, external 4.7kΩ resistor pulled high to VDD required

